



INSTRUCTION SHEET

ELECTRONIC BOARD REPLACEMENT (PART NO. SV63821)

⚠ WARNING


It is recommended to wear safety glasses and gloves while performing these instructions.

1. Unplug unit.
2. Using a Robertson or a Phillips no. 2 screwdriver, remove the screw holding the electrical compartment cover. Slide the cover to remove it, and set cover and screw aside.
3. If applicable, disconnect the optional control connector from the terminal block.
4. Disconnect all connectors from the electronic board.
5. Remove electronic board from its support by opening up the brackets holding the card in place, and pulling the board out.
6. Install the new electronic board and plug back all the connectors as follows:
 - J4: Supply motor
 - J5: Exhaust motor
 - J6: Capacitor (any one)
 - J7: Capacitor (any one)
 - J8: Transformer (yellow wires)
 - J9: Transformer
 - J10: Power cord
 - J12: Thermistor
 If needed, refer to the wiring diagram below.
7. Finalize installation by reversing steps 3 to 1.

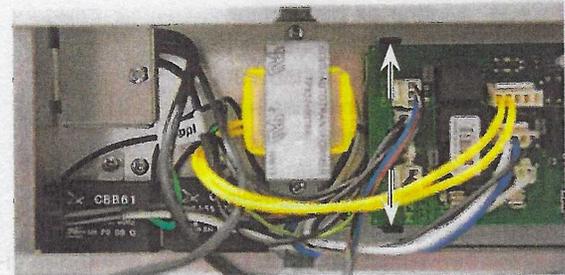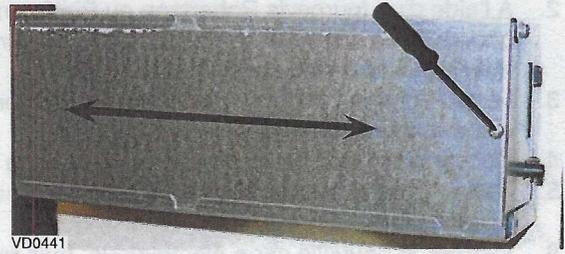

CAUTION

Avoid pinching wires when closing the electrical compartment cover.

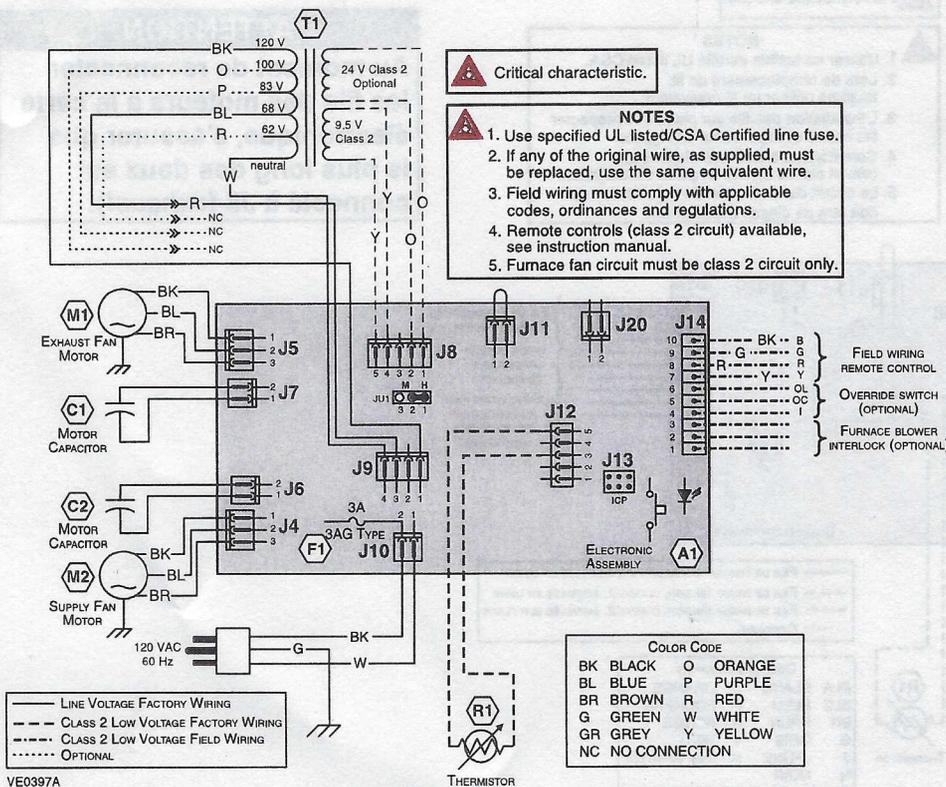



FEUILLE D'INSTRUCTIONS

REPLACEMENT DE LA CARTE ÉLECTRONIQUE (PIÈCE N° SV63821)

⚠ AVERTISSEMENT

Il est recommandé de porter des lunettes et des gants de sécurité lors de l'exécution de ces directives.

1. Débrancher l'appareil.
2. À l'aide d'un tournevis Robertson ou Phillips n° 2, retirer la vis du couvercle du compartiment électrique. Glisser le couvercle pour le retirer, puis le mettre de côté avec la vis.
3. Le cas échéant, déconnecter le bornier de connexion des commandes optionnelles de la carte.
4. Déconnecter tous les connecteurs de la carte électronique.
5. Retirer la carte électronique en écartant les pattes du support et en la dégageant.
6. Installer la nouvelle carte électronique, puis reconnecter tous les connecteurs comme suit :
 - J4 : Moteur de distribution
 - J5 : Moteur d'évacuation
 - J6 : Un des condensateurs
 - J7 : Un des condensateurs
 - J8 : Transformateur (fils jaunes)
 - J9 : Transformateur
 - J10 : Cordon d'alimentation
 - J12 : Thermistor
 Au besoin, se référer au schéma électrique ci-dessous.
7. Terminer l'installation en inversant les étapes 3 à 1.

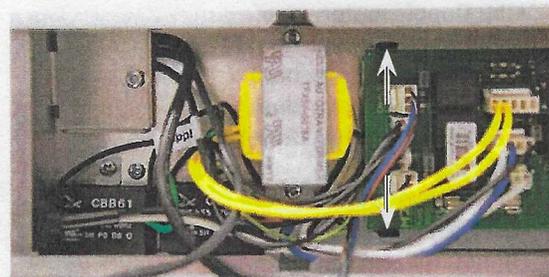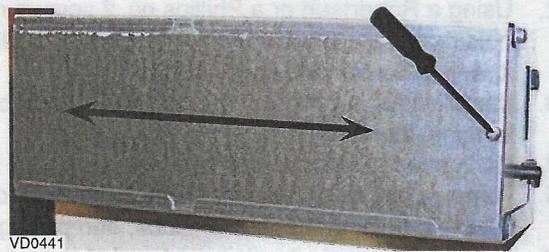

ATTENTION

S'assurer de ne pas pincer les fils en refermant le couvercle du compartiment électrique.

